

TECHNISCHE SPECIFICATIES

TECHNICAL SPECIFICATIONS
TECHNISCHE DATEN

BUCKRAM PREMIUM



ketting/warp/Kette

draden/threads/Fäden
katoen/cotton/Baumwolle
Polyester
Nm

per cm 20.1
% 50
% 50
Nm 34



inslag/weft/Schuss

draden/threads/Fäden
katoen/cotton/Baumwolle
Polyester
Nm

per cm 18
% 50
% 50
Nm 28



gewicht/substance

g/m² ≈ 232



dikte/caliper/Dicke

mm ≈ 0.32



caching/backing paper

-



lengte/roll size/Länge

meter 50



breedte/width/Breite

benutbare breedte/usable width/Nutzbreite cm 108


BUCKRAM PREMIUM

COATED

Een tijdloos en degelijk product dat door de combinatie van polyester en katoen voldoet aan alle eisen op het gebied van treksterkte en slijtvastheid. Door de pu topcoating heeft Buckram Premium een hoog vuil- en waterafstotend vermogen.

The combination of polyester and cotton results in a classic and durable product that meets all requirements concerning tensile strength and wear-resistance. The pu top coating gives Buckram Premium its high dirt- and water-resistant qualities.

Ein zeitloses und haltbares Product, das durch die Kombination von Polyester und Baumwolle alle Anforderungen an Zug- und Verschleißfestigkeit erfüllt. Durch die Oberflächenbeschichtung aus Pu ist Buckram Premium enorm schmutz- und wasserabweisend.




van Heek textiles

L. van Heek Textiles
Gronausestraat 309
7581 CV Losser - Holland
Telephone +31(0)53 5371111
info@vanheektextiles.com
www.vanheektextiles.com

FOLLOW US



BUCKRAM PREMIUM

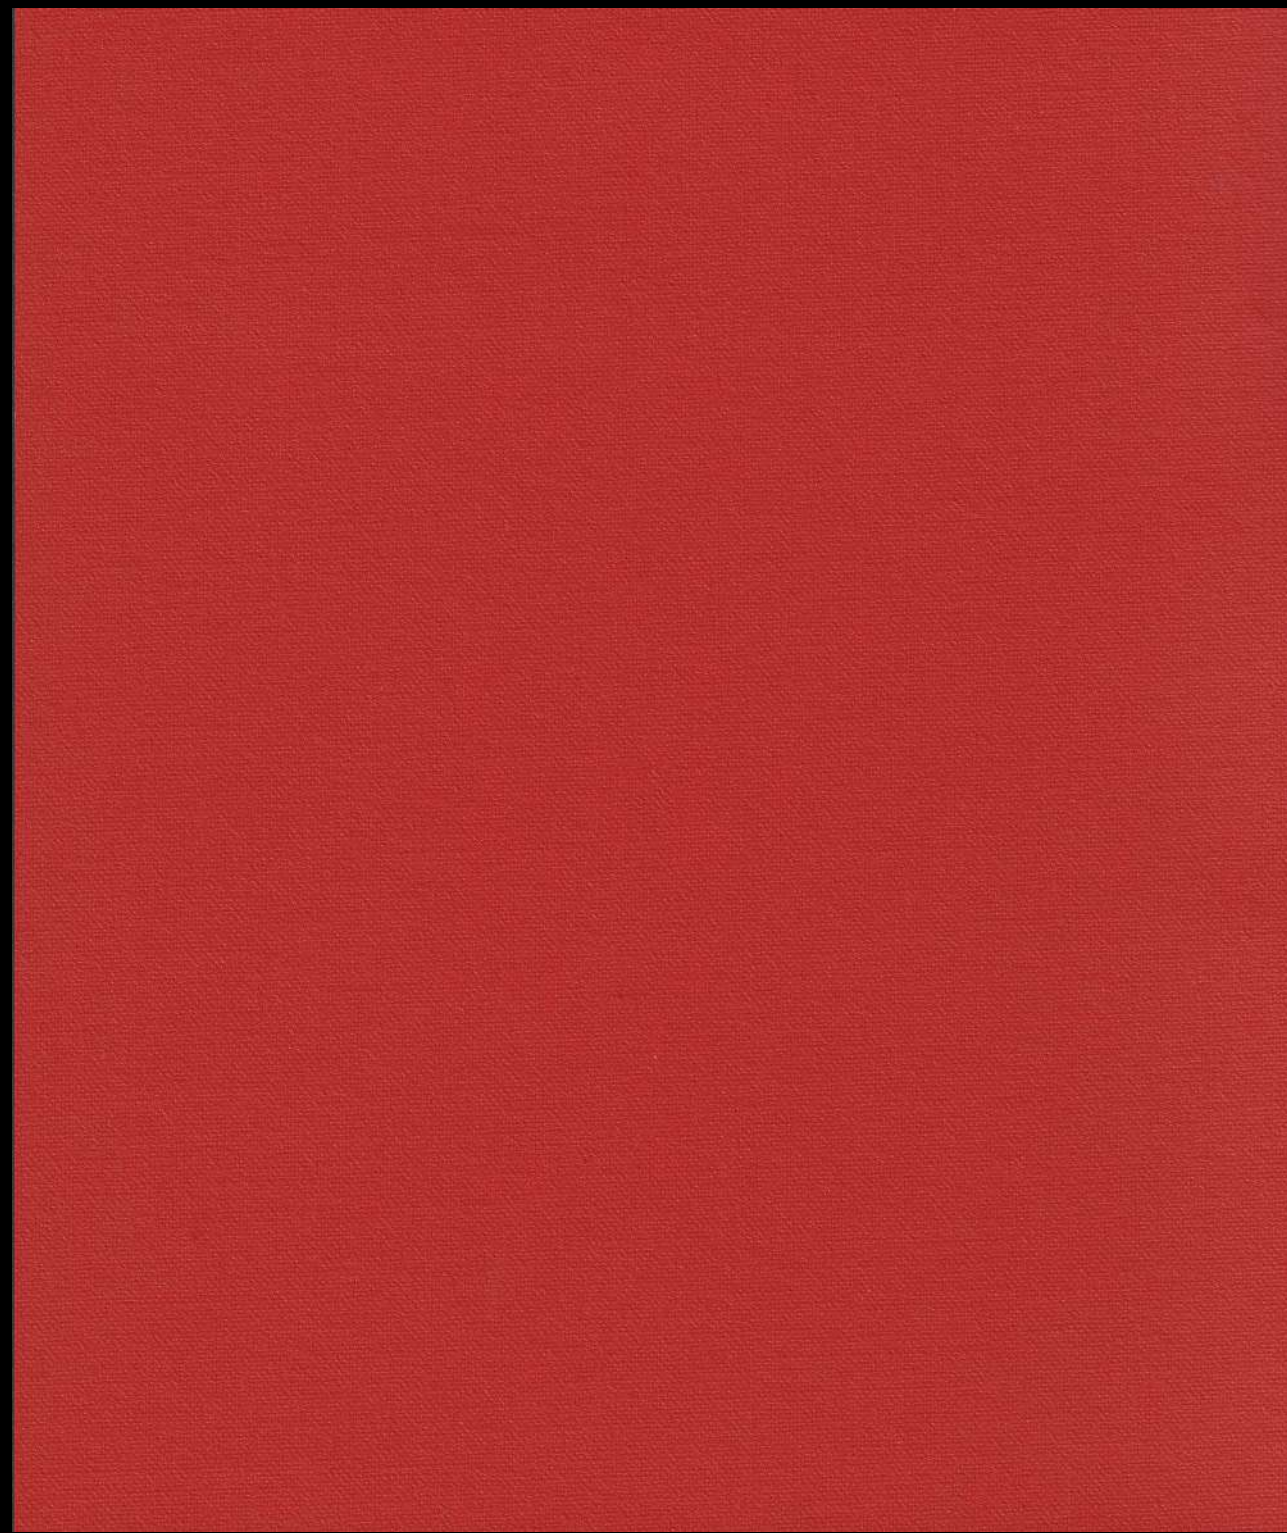

29014 Technische specificaties: zie achterzijde / Technical specifications: see back of card / Technische Daten: siehe Rückseite

BUCKRAM PREMIUM



29007



29002



29026



29000



29006




29022



29020



29023



29003



29032



29001



29025



29011



29013



29005



29019



29009




29012



29008



29016



29015



29010



29004



29031